


Sigen Hybrid Inverter

50.0 / 60.0 / 80.0 / 100.0 / 110.0 / 125.0 kW



- Battery ready, easy upgrades to a PV + BESS at any time
- Smaller and lighter, easier installation and transportation
- Built-in EMS, supports 100 units in parallel without data logger
- Industry-leading 500m AFCI, top-tier safety across applications
- On-site self-power supply, removes the need for temporary power
- IP66 protection rating, ensuring worry-free outdoor deployment

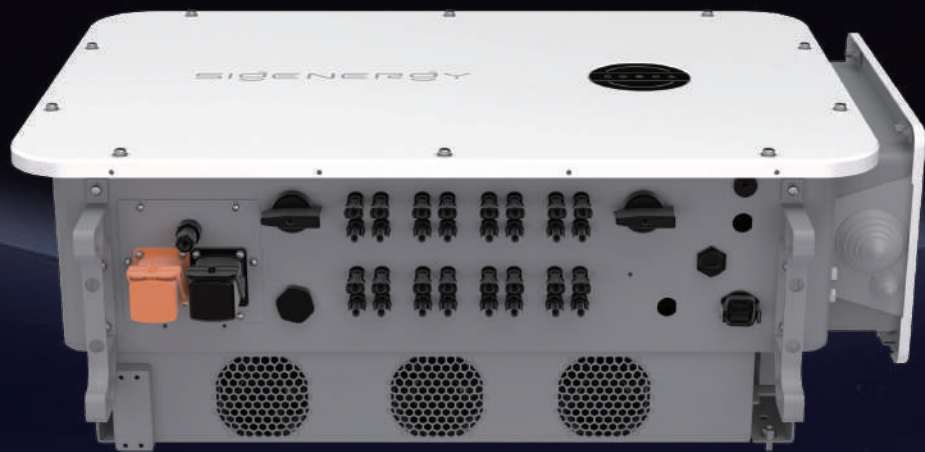

Sigen Hybrid Inverter 50.0 / 60.0 / 80.0 / 100.0 / 110.0 / 125.0 kW

Sigen PV	50M1-HYA	60M1-HYA	80M1-HYA	100M1-HYA	110M1-HYA	125M1-HYA	Units
DC Input (PV)							
Max. PV input power	100,000	120,000	160,000	200,000	220,000	220,000	Wp
Max. DC input voltage	1,100						V
Nominal DC input voltage	600 @380/400 Vac, 720 @480 Vac						V
Start-up voltage	180						V
MPPT voltage range	160 ~ 1,000						V
Number of MPP trackers	4	5	6	8	8	8	
Number of PV strings per MPPT	2						
Max. input current per MPPT	40						A
Max. short-circuit current per MPPT	60						A
DC Input (Battery)							
Battery module models	SigenStack BAT 12.0						
System configuration quantity range ¹	4 ~ 21						pcs
Max. charge power	55,000	66,000	88,000	110,000	121,000	137,500	W
Max. discharge power	55,000	66,000	88,000	110,000	121,000	137,500	W
Max. operating current	180						A
AC Output							
Nominal output active power	50,000	60,000	80,000	100,000	110,000	125,000	W
Max. output apparent power	55,000	66,000	88,000	110,000	121,000	137,500	VA
Max. output active power (cosΦ=1)	55,000	66,000	88,000	110,000	121,000	137,500	W
Nominal output current @380Vac	76.0	91.2	121.5	151.9	167.1	189.9	A
Nominal output current @400Vac	72.5	87.0	115.9	144.9	159.4	181.2	A
Nominal output current @480Vac	60.2	72.2	96.3	120.3	132.4	150.4	A
Max. output current @380 / 400Vac	83.6	100.3	133.7	167.1	183.8	208.9	A
Max. output current @480Vac	66.2	79.4	105.9	132.4	145.6	165.5	A
Nominal output voltage	380 / 400 / 480, 3W+(N)+PE						Vac
Nominal grid frequency	50 / 60						Hz
Power factor	0.8 leading ~ 0.8 lagging						
Total current harmonic distortion	THDi < 3%	THDi < 3%	THDi < 2%	THDi < 2%	THDi < 2%	THDi < 2%	
Efficiency							
Max. efficiency @380/400 Vac	98.6%						
European efficiency @380/400 Vac	98.3%	98.3%	98.3%	98.4%	98.4%	98.3%	
Max. efficiency @480 Vac	98.8%						
European efficiency @480 Vac	98.4%	98.4%	98.4%	98.6%	98.6%	98.4%	
Protection							
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter, AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection						
General Data							
Dimensions (W / H / D)	918 / 640 / 340			999 / 668 / 348			mm
Weight	78			95			kg
Nighttime power consumption	< 3.5			< 4			W
Storage temperature range	-40 ~ 70						°C
Operating temperature range	-30 ~ 60						°C
Relative humidity range	0% ~ 100%						
Max. operating altitude	5,000 (Derating at 4,000m)						m
PV connection type	MC4 (Max. 6 mm²)						
AC connection type	OT / DT terminal (Max. 240 mm²)						
Cooling	Smart air cooling						
Ingress protection rating	IP66						
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)						
Standard Compliance							
Standard ²	IEC / EN 62109-1, IEC / EN 62109-2, IEC / EN 61000-6-1, IEC / EN 61000-6-2						

1. The requirements for the PV string open-circuit voltage in a PV+ESS DC coupling system are as follows: 1.) When the system is configured with ≥19 battery modules, the string open-circuit voltage should meet the following minimum requirements: 1.1) If configured with 21 battery modules, the string open-circuit voltage should be > 935 V; 1.2) If configured with 20 battery modules, the string open-circuit voltage should be > 870 V; 1.3) If configured with 19 battery modules, the string open-circuit voltage should be > 805 V. 2) When the system is configured with 4 to 18 battery modules, the string open-circuit voltage has no special requirements.

2. For all standards refer to the certificates category on the Sigenenergy website.

3. The information in this document reflects the current state of technology and is subject to change without notice. For the latest updates, please refer to the Sigenenergy website.