




ALPS72D30-TP

580-605W

High Performance
N-type Dual Glass Bifacial Solar Module

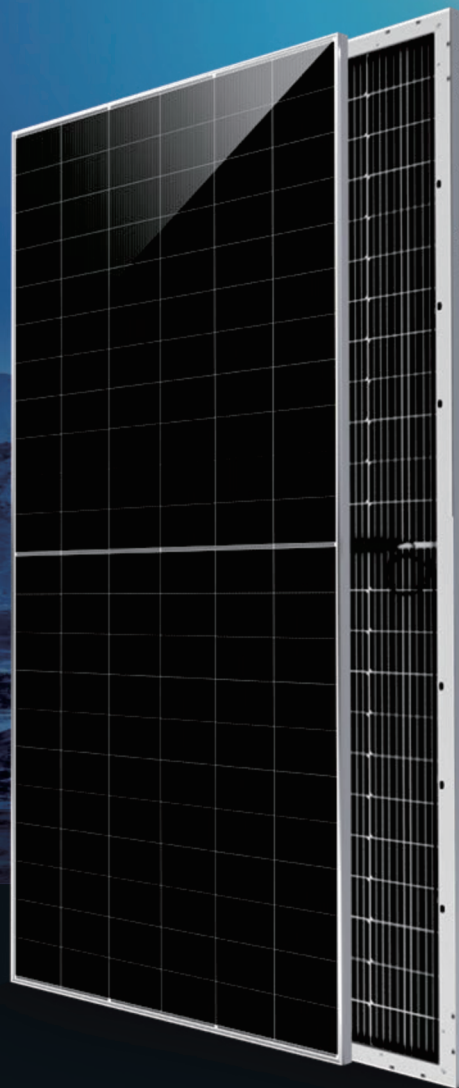

30 LINEARITY POWER
YEAR AND
OUTPUT WARRANTY

25 EXCELLENT PRODUCTS
YEAR MATERIAL AND
PROCESS WARRANTY

KEY FEATURES



Reliable Quality

Manufactured with consistent quality and advanced technology across our global production facilities.



Exceptional Efficiency

Delivers superior energy yield even in low-light or high-temperature conditions.



Tested for Extreme Conditions

Certified under IEC 61215 and withstand 45 mm hail impact demonstrating reliability and strength.



N-Type with Low LID

Advanced N-type cells minimize Light-Induced Degradation (LID) for performance stability.



Industry-Leading Warranty

30-year performance and 25-year product coverage surpass industry norms.

COMPREHENSIVE CERTIFICATES



Solutions



CALIFORNIA
ENERGY COMMISSION

IEC 61215, IEC 61730, UL 61730


ISO 9001: 2015 / Quality Management System

ISO 14001: 2015 / Environmental Management System


ISO 45001: 2018 / Occupational Health and Safety

ALPS N-TYPE MODULE PERFORMANCE WARRANTY


RELATIVE POWER(%)

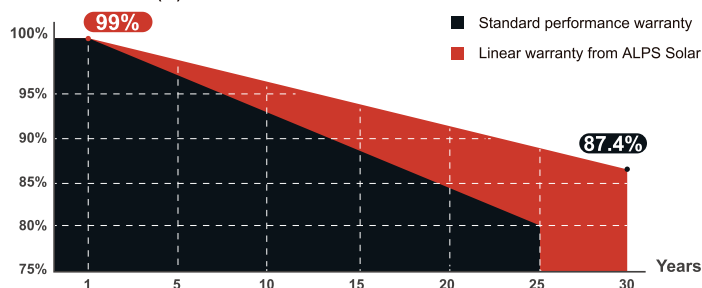

ENGINEERING DRAWINGS

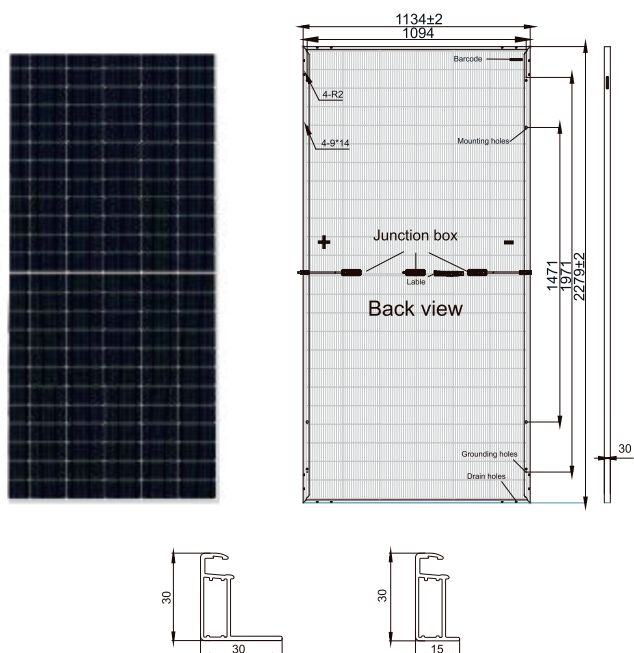

I-V CURVES

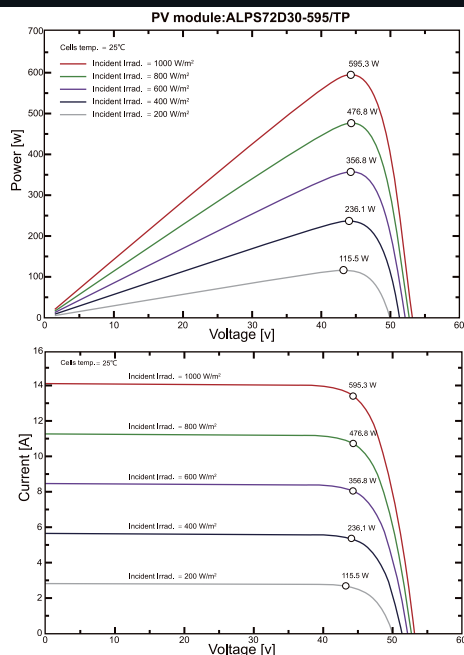

PACKING CONFIGURATION

Pieces per pallet	36 pcs
Pallet Dimension	2320 x 1135 x 1255 mm
Weight of packing	1186 kg / 2615 lb
Pieces per container	720 pcs
Size of container	40'HQ

ELECTRICAL CHARACTERISTICS (STC)

Power Level	580	585	590	595	600	605
Pmax (W)	580	585	590	595	600	605
Vmp (V)	43.95	44.15	44.35	44.55	44.75	44.95
Imp (A)	13.20	13.25	13.30	13.36	13.41	13.46
Voc (V)	52.50	52.70	52.90	53.10	53.30	53.50
Isc (A)	13.93	13.99	14.05	14.11	14.17	14.23
Module Efficiency (%)	22.44	22.64	22.83	23.02	23.22	23.41
Power Tolerance (W)	0~+3%					
Temperature Coefficient Pmax (%/°C)	-0.29					
Temperature Coefficient Isc (%/°C)	0.004					
Temperature Coefficient Voc (%/°C)	-0.25					

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5

BIFACIAL OUTPUT-BACKSIDE POWER GAIN

5%	Power Output (W)	609	614	620	625	630	635
	Module Efficiency (%)	23.56	23.77	23.97	24.17	24.38	24.58
10%	Power Output (W)	638	644	649	655	660	666
	Module Efficiency (%)	24.69	24.90	25.11	25.33	25.54	25.75
20%	Power Output (W)	696	702	708	714	720	726
	Module Efficiency (%)	26.95	27.16	27.40	27.63	27.86	28.09

WORKING CHARACTERISTICS (BNPI)

Pmax (W)	643	648	654	659	665	670
Vmp (V)	44.05	44.25	44.45	44.65	44.85	45.05
Imp (A)	14.59	14.65	14.71	14.77	14.82	14.88
Voc (V)	52.60	52.80	53.00	53.20	53.40	53.60
Isc (A)	15.43	15.49	15.55	15.61	15.67	15.73

BNPI: Front Irradiance 1000 W/m², Rear 135 W/m², Cell Temperature 25°C, AM=1.5

WORKING PARAMETERS

Maximum System Voltage	1500V DC (IEC)
Operational Temperature	-40~+85 °C
Maximum Series Fuse Rating	30 A
Maximum Static Load, Front	5400 Pa
Maximum Static Load, Back	3750 Pa
NOCT	45±2 °C
Safety Class	Class A

MECHANICAL CHARACTERISTICS

Solar Cells	182 N-type
Number of Cells	132 pcs (6x24)
Module Dimensions	2279 x 1134 x 30 mm
Weight	31 kg / 68.3 lb
Cable Cross Section Size	4 mm² (IEC), 12 AWG (UL)
Junction box	IP68, 3 diodes
Connectors	Stäubli EVO2
Output Cable (accept customization)	(+) 1200 mm / (-) 1200 mm
Front Glass / Back Glass	2.0 mm / 2.0 mm

MAXIMUM RATINGS

Operating Temperature	-40~85 °C
Operating Humidity	5~85 %RH
Hail Impact Resistance	Withstands 45 mm hail at 31 m/s

Revised in July 2025 1st Edition*

CAUTION: All rights and explain reserved by Alps Solar Energy Inc.
Specifications included in this datasheet are subject to change without notice.
The specific content of the product warranty refers to Alps's latest warranty.